


I/O Connector Panel

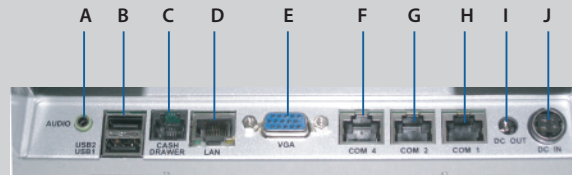

- A. Audio Port
- B. USB
- C. Cash Drawer
- D. LAN
- E. VGA Port
- F. COM4
- G. COM2
- H. COM1
- I. DC 12V Out
- J. DC-in

Specifications

Model	KM-150B
CPU	VIA Eden (V4 Bus) series processors up to 1.0GHz with FSB 400
Chipset	VIA CX700M / ITE IT8712
Memory	Maximum 1GB (1 x 200-pin DDR2 400/533 SDRAM SO-DIMM)
Touch LCD Display	
Size / Resolution	15" TFT LCD / 1024 x 768
Brightness	250 / 350 cd/m ²
Touch Screen	ELO 5 wire Resistive
I/O Connectivity	
Serial Port	• 3 x External : COM1 & COM2 (D-Sub), COM4 (RJ45) • 1 x Internal : COM3 for Primary Touchscreen
USB Port	2 x USB 2.0 (external)
Cash Drawer Port	1 x 12V RJ11 (single/dual)
PS/2	N/A
LAN Port	1 x RJ45 10/100 Base-T
Video Port	1 x VGA
Audio Port	1 x Line-out
Storage Device	1 x 2.5" SATA HDD 1 x CF Card (optional)
Power Supply	60W External Power Adaptor
Construction	Aluminum Die-casting Housing
Housing Color	Black
O/S Supported	Windows 2000, XP, XPE, WEPOS
Dimensions (W x H x D)	370 x 280 x 120 mm
Weight	6.5 Kgs
EMI/Safety	CE, FCC
Operating Temperature	0°C ~ 40°C
Optional Peripherals	
Magnetic Card Reader	Integrated MCR single/dual/triple Track
Wireless LAN	Integrated 802.11b/g Wireless LAN Module (USB interface)

All product specifications are subject to change without notice.



FEC

FIRICH ENTERPRISES CO., LTD.
10F., No.75, Sec. 1, Sin Tai Wu Rd., Sijhih City,
Taipei County 221, Taiwan R.O.C.
tel + 886 2 2698 1446 fax + 886 2 2698 1451
www.firich.com.tw

Firich China - Crimson
Room 1508, No. 818, NanJing(West) Road,
JingAn District, ShangHai City, China (Post Code : 200041)
tel +86 21 5109 6766 fax + 86 21 2301 0268
www.firich.com.cn

Firich Korea Inc.
506 Daerung, 8th Kasan-Dong,
481-11 Geumcheon, Seoul, Korea
tel + 82 2 837 6610 fax + 82 2 837 8070
www.firich.co.kr

Firich USA Inc.
41668 Christy Street, Fremont, CA 94538, USA
tel + 1 510 683 9188 fax + 1 510 683 9288
sales@firichusa.com
www.firichusa.com